

HYDROMAXILIGHT 8m

Hydraulische lichtmast - Hydraulic lighting tower




- Maximale hoogte 8.2m
- Telescopische gegalvaniseerde lichtmast
- 4 instelbare stabilisatoren
- De Hydromaxilight is hydraulisch op te richten
- Handmatig roteerbaar tot 340°
- Gecertificeerd tot windsnelheden van 80 km/uur
- Overzichtelijk bedieningspaneel aan binnenzijde van cabinet
- 4 x 1000 watt gasontladinglampen
- Iedere lamp is onafhankelijk in- en uit te schakelen
- Het hydraulische systeem is voorzien van een nood-daal systeem
- Vorkheftruckpockets en hijsogen maken de Hydromaxilight eenvoudig transportabel
- De Hydromaxilight lichtmast is aan te sluiten aan netstroom of een separate generator

- Maximum height 8.2m
- Telescopic galvanized mast
- 4 x extractable / adjustable in height stabilizers contained in box
- Hydraulic lifting system
- 340 degree mast rotation by hand
- Certified wind proof up to 80Km/h
- Hydraulic command for rising and lowering lighting towers housed in metal cabinet
- Electrical coiled cable complete with housing
- 4 floodlights 1000W metal halide
- Lamps complete with bulb
- On/Off switches one for each lamp
- In case of damage at the hydraulic system, safety valve enables lowering of the tower
- Special pockets and rings for lifting the structure with cranes or fork lifts
- Possibility to ignite the lamps from main or generating set




HYDROMAXILIGHT 8m

Hydraulische lichtmast - Hydraulic lighting tower

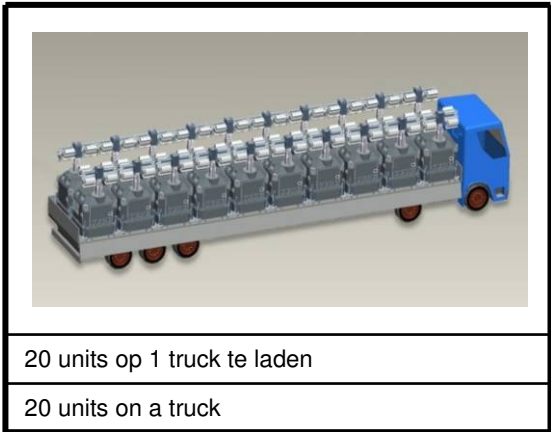

20 units op 1 truck te laden

20 units on a truck

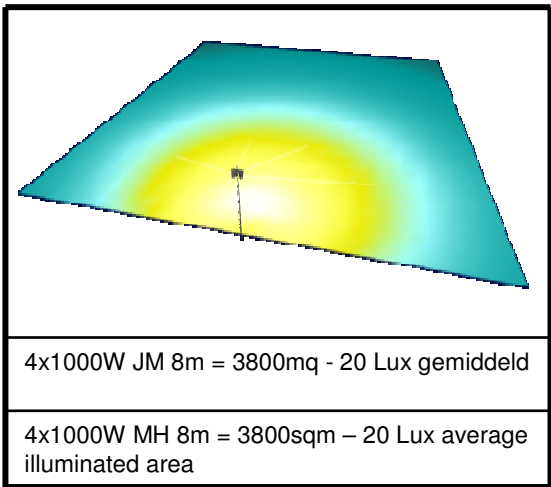

4x1000W JM 8m = 3800mq - 20 Lux gemiddeld

4x1000W MH 8m = 3800sqm – 20 Lux average illuminated area



Afmetingen en gewicht – Dimensions and weight

Afmetingen ingeschoven (cm)	133x122x220
Afmetingen uitgeschoven (cm)	267x267x820
Gewicht/Weight (Kg)	670

Verlichtingsoppervlakte - Illuminated area

3800m²

Karakteristieken – Features

Roteerbaar/Rotation	340°
Lampen/Floodlights	Joduri / metal halide
Armaturen/Lamps	4x1000W
Secities/ Sections	7
Opties:	